





PROVIDING THE
HIGHEST LEVEL OF
PROTECTION FOR CASH
AND VALUABLES TO
SABS STANDARDS

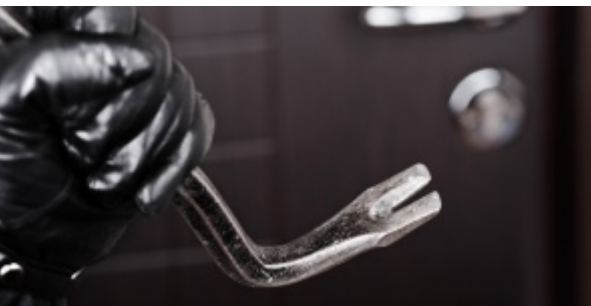

TITANIUM

CAT2ADM–CAT5 BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Titanium safes are tested and certified by leading test authorities
- A range of tools typically used in professional burglary attempts were used to test the level of resistance according to South Africa's SANS 751, from basic equipment, such as hammers and simple drills, to sophisticated thermal and electrical equipment, such as oxyacetylene torches and diamond disc cutters
- Base fixing is standard on all models
- Our research into barrier materials has provided an advance range specially selected for the Titanium. The characteristics of the Borox™SP barrier material strengthens the resistance to cutting, coupled with special construction techniques, provide unmatched resistance to attack in each category
- The Titanium range can be customised with a choice of locking options, shelves and lockable drawers

TITANIUM

PRODUCT SPECIFICATIONS

CATEGORY 2ADM – CATEGORY 4

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves	No. of Drawers
45	540	540	525	400	400	320	45	269	0	0
100	940	540	525	800	400	320	100	383	0	0
280	1340	640	675	1200	500	470	280	780	3	2x 1/2 w
340	1590	640	675	1450	500	470	340	915	3	2x 1/2 w

CATEGORY 5

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves	No. of Drawers
200	1050	700	735	850	500	470	200	950	2	2x 1/2 w
280	1400	700	735	1200	500	470	280	1250	3	2x 1/2 w
340	1650	700	735	1450	500	470	340	1550	3	2x 1/2 w

DEPOSIT SAFES CATEGORY 2ADM – CATEGORY 4

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Position of deposit	No. of locks on deposit
F Trap	736	540	525	400	400	320	45	450	Front	1
F Trap	836	540	525	500	400	320	60	500	Rear	1
G Trap	736	540	525	400	400	320	45	450	Top	0


SABS CATEGORY RATING

Category 2ADM
Category 3
Category 4
Category 5



STANDARD LOCKING

Category 2ADM 2x Key locks
Category 3 2x Key locks
Category 4 2x Key locks, 1x Combination lock
Category 5 2x Key locks, 1x Combination lock




LOCKING OPTIONS

Manual combination dials or a range of electronic locks with various features are available at an additional cost.




DEPOSIT SAFE OPTIONS

F-Trap Front Flush
Drop size: 200 x 258 x 100mm



F-Trap Rear
Drop size: 200 x 258 x 100mm
Maximum wall thickness of 230mm



G-Trap Top
Drop size: 95 x 215 x 95mm
(180mm when drawer is pulled out)
Patent keyless design maintains security



Authorised dealer

www.chubbsafes.com